




640 Site Considerations, Plant Installation Requirements, and Details

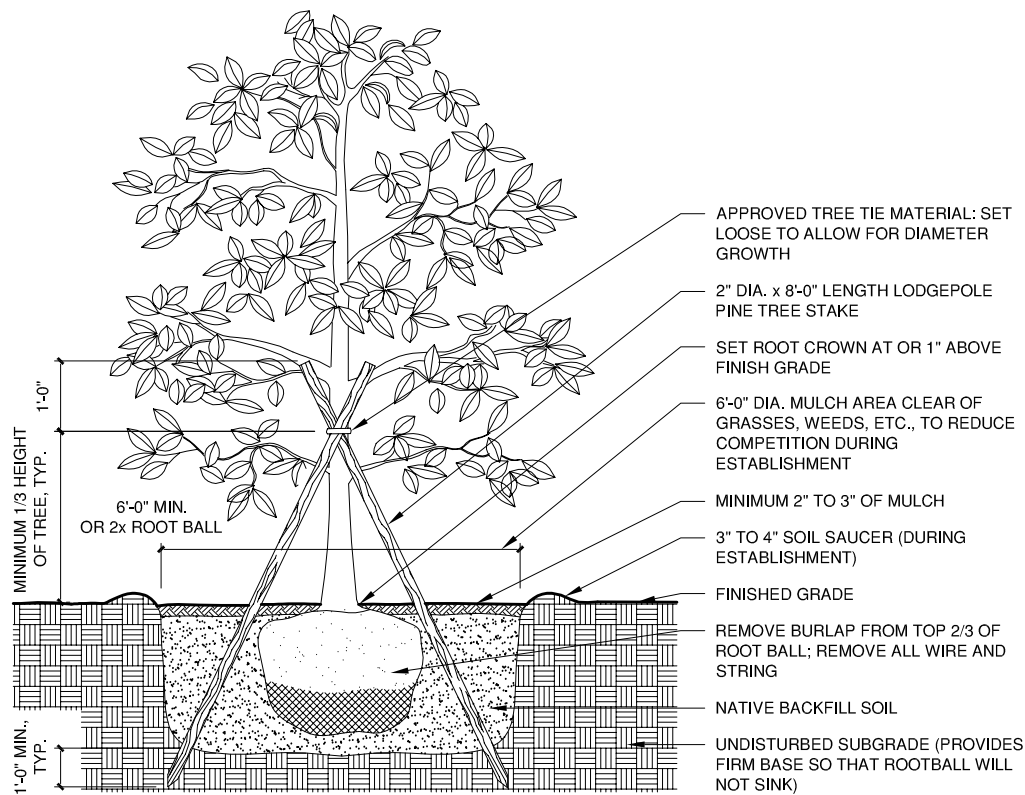


**TWO ANGULAR STAKES**

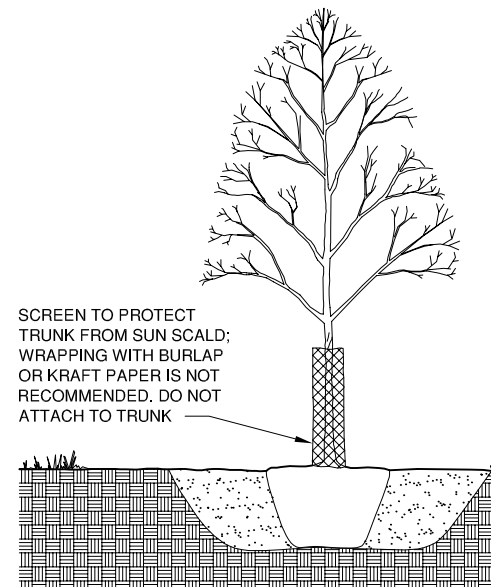


**TREE TRUNK PROTECTION**

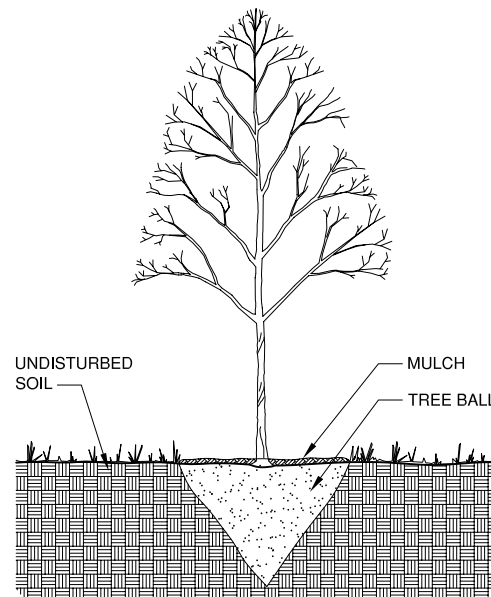

**TYPICAL TREE SPADE BALL AND PLANTING PIT CONFIGURATION**

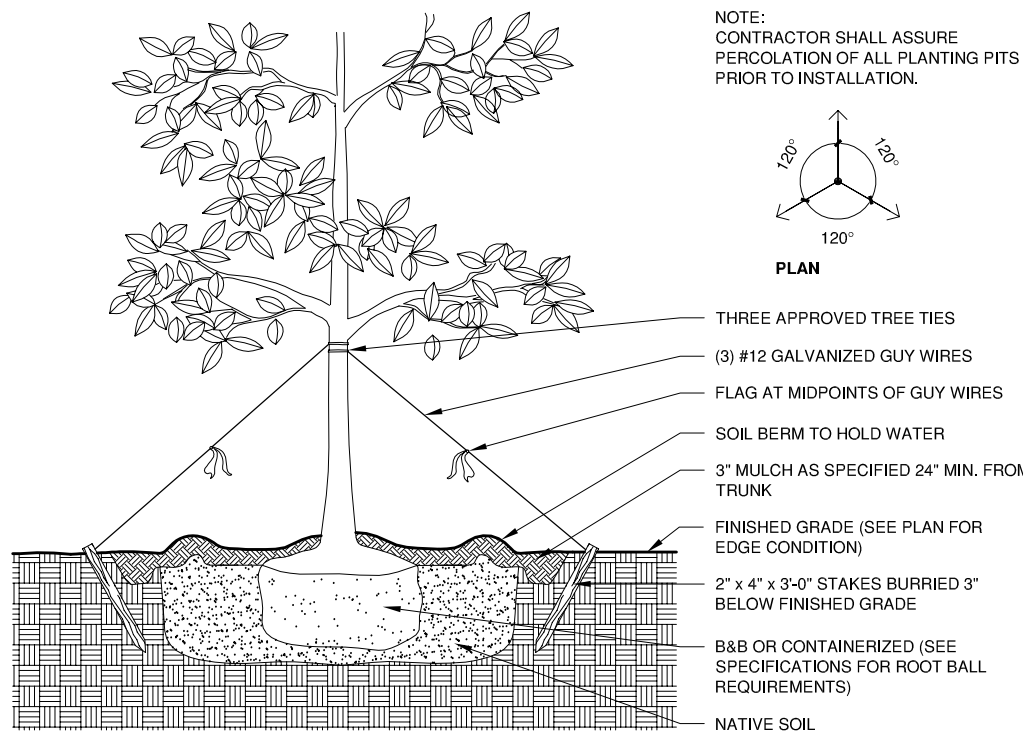

NOTE:  
CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.



**PLAN**

**THREE GUY WIRE STAKING SYSTEM**

- If soil is poor or wet, hold plant up several inches to aid drainage.
- After the plant is installed, loosen soil to a depth of 12 to 18 inches around the plant plug to encourage root development.
- Do not move plants on hot and/or windy days.
- Spray foliage with antitranspirant prior to transplanting to reduce moisture loss.
- If plant pit sides are glazed, roughen them before the plant is set in the pit.
- Water the plant well after planting to eliminate air pockets between the plant plug and the surrounding soil.
- Since the plants moved are often quite large, staking may be required.
- Mark best side of plant prior to digging so desired side is facing the proper direction upon installation.

Thomas J. Nieman, Ph.D., Department of Landscape Architecture University of Kentucky

**PART 3 PROCESS, IMPLEMENTATION, AND APPLICATION**